

WIRELESS & WIRED SENSORS

Image 1.



- ✓ A compact stainless steel unit (IP-66), integrating Phantom Gateway 2.0 and 4G/Wi-Fi router.
- ✓ It allows the connection of wireless and wired sensors (with Phantom modules), enabling data transmission to the cloud via SIM card or Ethernet.

PREDICTIVE AND PROCESS MONITORING SYSTEM INOX_RUT_3A_GW_MV26 - 30x30




M.V Industrial Group
Via La Spezia, 218 (43126) Parma Tel. 0521-573327
Mail: mv@mv-ig.com www.mv-ig.com

MODEL:

INOX_RUT_3A_GW_MV26 – 30x30

Components

1. Stainless steel box (IP-66)
2. Phantom Gateway 2.0
3. Router
4. Bluetooth antenna
5. Wi-Fi antenna
6. 4G antenna
7. Power Supply (230V/50HZ)
8. Magnetothermic
9. Fuse holder

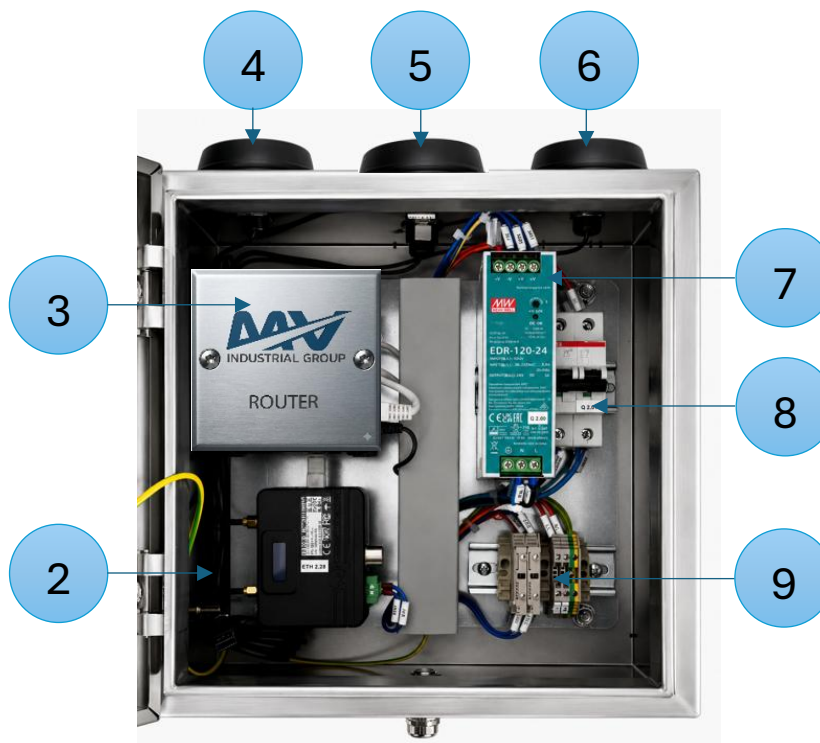

Considerations

- Dedicated software for continuous monitoring:
 - ✓ Locally.
 - ✓ Remotely.
 - ✓ Ethernet, cloud, remote attachment available
- Adaptable to different types of sensors: (Image.1)

WIRELESS AND WIRED SENSORS THROUGH TRANSMIT OR REMOTELY CONNECTED WITH SIM CARD

- ✓ Phantom MAX
- ✓ Phantom EPH-V11E
- ✓ Phantom RPM Speed
- ✓ Phantom Current
- ✓ Phantom Thermocouple
- ✓ Phantom Infrared
- ✓ P. IR Thermographic Camera
- ✓ Voltmeter Input 0-10VDC
- ✓ Phantom 4-20mA Input
- ✓ Phantom 2VPP Input
- ✓ P. Dry Contact Digital Input

